

Then choose WITT for stainless steel valves and accessories. For hydrogen, corrosive gases or pure gas applications.



AD 2000, TÜV, DIN EN ISO 4126

**DO YOU REQUIRE HIGHEST STANDARDS FROM YOUR GAS SAFETY EQUIPMENT?**

HOLGER KOVAC: SALES MANAGER – WITT-GASETECHNIK

## HIGH QUALITY GAS SUPPLY WITH WITT STAINLESS STEEL SAFETY DEVICES.



WITT-Gasetechnik offers a wide range of stainless steel flashback arrestors, non-return valves, safety relief valves and gas filters. WITT stainless steel safety devices are of highest quality and very robust and are suitable for hydrogen applications as well as with pure or corrosive gases or when used in corrosive environments.

WITT offers safety equipment you can trust and rely on. State of the art manufacturing technologies, premium stainless steel (e.g. 1.4305/AISI 303, 1.4404/AISI 316L, 1.4541/AISI 321) and a sophisticated quality management system guarantee highest quality. It goes without saying that WITT products meet all relevant international standards. For your safety.

With a highly skilled workforce and extensive know-how WITT offers highest level of expertise even for special applications. With complete development and manufacturing from a single source we can rapidly respond to your demands. Talk to us about your requirements. We will provide your individual safety solutions.

- › **OUR PORTFOLIO**
- **FLASHBACK ARRESTORS**
- **NON-RETURN VALVES**
- **SAFETY RELIEF VALVES**
- **DOME-LOADED PRESSURE REGULATORS**



› APPLICATIONS FOR STAINLESS STEEL DEVICES

- **HYDROGEN**  
Automotive industry  
Fuel cells  
Power generation
- **PURE GASES**  
Food industry  
Pharmaceutical industry  
Chemical industry  
Glass industry  
Research facilities
- **CORROSIVE GASES / ENVIRONMENTS**  
Biogas plants  
Petrochemical industry









WITT – BECAUSE YOUR SAFETY IS PRECIOUS!

# FLASHBACK ARRESTORS



WITT flashback arrestors are used to protect the gas supply and can be used for almost all technical gases. By combination of all established safety elements flashback arrestors provide protection against flashbacks and backfire. Flashback arrestors also prevent the formation of dangerous gas mixtures within the pipeline.

- Combination of flame arrestor, non-return valve and thermal cut-off for optimal protection
- Extinguish dangerous flashbacks or backfire
- Avoid explosive mixtures in the gas supply
- Depending on requirements, individual selection of safety features possible
- For fuel gases and oxygen
- Installation independent of the orientation
- Long durability
- Variety of connections available

Model	Remarks	Gases / Max. working pressures / Flows							Inlet Gas Filter	Safety elements			Connections Depending on model	
		Opening pressure	Acetylene (A)	Ethylene (E)	Oxygen (O)	LPG (P)	Hydrogen (H)	Natural Gas (M)		Flame Arrestor (FA)	Non-Return Valve (NV)	Temperature activated Cut-off Valve (TV)	Threads	Sizes
RF53N-ES	 EN 730-1, ISO 5175 CE-marked according to PED 2014/68/EU CE0045	ca. 30 mbar	1,5 bar / 10,6 m³/h		25 bar	5 bar	3 bar	5 bar	✓	✓	✓	✓	G/BSP NPT Rc UNF VCR	1/4" – 1.1/2"
RF53N/H-ES	 EN 730-1, ISO 5175 CE-marked according to PED 2014/68/EU CE0045	ca. 30 mbar				8 bar	9 bar	12 bar	✓	✓	✓	✓		
RF85-10N-ES	 EN 730-1, ISO 5175 CE-marked according to PED 2014/68/EU CE0045	ca. 30 mbar	1,5 bar / 19,7 m³/h	5 bar	25 bar	5 bar	4 bar	5 bar	✓	✓	✓	✓		
RF85-10N/H-ES	 EN 730-1, ISO 5175 CE-marked according to PED 2014/68/EU CE0045	ca. 30 mbar		9 bar		5 bar	10 bar	10 bar	✓	✓	✓	✓		
RF85-20N-ES	 EN 730-1, ISO 5175 CE-marked according to PED 2014/68/EU CE0045	ca. 4 mbar	1,5 bar / 43,5 m³/h	4 bar	16 bar	4 bar	4 bar	4 bar		✓	✓	✓		
RF85-30N-ES	 EN 730-1, ISO 5175 CE-marked according to PED 2014/68/EU CE0045	ca. 10 mbar	1,5 bar / 66,5 m³/h	4 bar	25 bar	3,5 bar	4 bar	5 bar	✓	✓	✓	✓		
RF85-30N/H-ES	 EN 730-1, ISO 5175 CE-marked according to PED 2014/68/EU CE0045	ca. 10 mbar	1,5 bar / 66,5 m³/h		25 bar	3,5 bar	11 bar	5 bar	✓	✓	✓	✓		
F100N-ES	 EN 730-1, ISO 5175 CE-marked according to PED 2014/68/EU CE0045						17 bar	17 bar		✓		✓		



# NON-RETURN VALVES



WITT non-return valves protect plants, pipelines and outlet points against reverse gasflow. The product range of non-return valves offers a wide range of dimensions and flow rates. The sophisticated valve technology of WITT non-return valves provides small pressure drops making them also suitable for applications with smallest operating pressures.

- Avoid the formation of explosive mixtures in the gas supply
- Maximum working pressures: 40 bar / 300 bar
- For all technical gases – wide range of applications
- Low pressure drops – using complex valve assembly with low opening pressures
- Sophisticated valve design using elastomer sealings for leak tightness and long service life
- Installation independent of the orientation
- Variety of connections available



# SAFETY RELIEF VALVES



WITT safety relief valves protect against over pressure by venting excess gases from pipelines, gas receivers and other equipment. The spring-loaded, direct action relief valves are suitable for individual opening pressures from 5 mbar to 45 bar. The compact size allows easy installation in any orientation and makes the valves suitable for many applications.

- Spring-loaded, direct action relief valves
- Individual opening pressure from 5 mbar to 45 bar
- For all technical gases – wide range of applications
- Compact size
- Installation independent of the orientation
- Protective dust cap
- Variety of connections available
- High blow-off volume up to approx. 970 m<sup>3</sup>/h / 34,240 scfh
- Diverse applications for all technical gases in the temperature range from -60°C to + 270 °C / -76 °F to 518 °F (varies depending on model and type of gas)
- TÜV certificate verifies the individually set opening pressure on request








Model	Remarks	Technical information				Features		Certificates	
		Opening pressure	Inlet connection	Outlet connection	With condensation outlet	Inlet filter (optional)	Manual ventilation	Manufactured and certified according to EN ISO 4126-1 AD 2000 bulletin A2 and VdTUV-bulletin 100	Single certification
SV805-ES	 <p>For gas receivers and pipelines CE-marked according to PED 2014/65/EU</p>	> 0.5 bar–45 bar 7 psi–652 psi	Depending on model  Threads G/BSP NPT VCR	M24 × 1	✓			✓	Module B+D
SV805A-ES	 <p>For gas receivers and pipelines CE-marked according to PED 2014/65/EU</p>	> 0.5 bar–45 bar 7 psi–652 psi	Sizes 1/4"–1"	1/2" NPT			✓	✓	Module B+D
AV619-ES		> 5 mbar–500 mbar 0.07 psi–< 7 psi	Other connections on request	G 1/2"–1" 1/2"–1" NPT		✓			Module H
SV811	 <p>For hydrogen vehicles EG 79/2009 CE-marked according to PED2014/68/EU CE0045</p>	4.5 bar–25 bar 25 bar–45 bar 65 psi–362 psi 362 psi–652 psi		M24 × 1				✓	Module B+D
AV919-ES		> 5 mbar–500 mbar 0.07 psi–< 7 psi		G 2" 2" NPT					Module H
AV 319-ES		10 mbar–80 mbar	G1/8"	G1/8"					Module B+D

## DOME-LOADED PRESSURE REGULATORS




Dome-loaded pressure regulators for installation in pipelines are particularly suitable for fluctuating or high flow rates at low gas pressure drops. High pressure stability guarantees a constant gas concentration and quality of the downstream processes. WITT dome-loaded regulators are available for inlet pressures up to 300 bar (4350 psi) and provide pressure regulation from 500 mbar to 60 bar (7.25 up to 870 psi). The dome-loaded regulators are operated in combination with a pilot pressure regulator or a proportional valve for adjusting the required working pressure. High flow rates (up to Kv value 30)

- Inlet pressures of up to 300 bar
- Outlet pressures between 500 mbar and 60 bar
- Useable for almost all gases including for corrosive and aggressive mediums
- Different connections
- Wall bracket (optional)
- Filter for long durability (optional)
- All models available as a ready-to-install completely mounted and tested set

Modell	Kv value	Max. inlet pressure	Max. inlet pressure O <sub>2</sub>	Max. inlet pressure CO <sub>2</sub>	Outlet pressure	Connection
767LE 	30	40 bar	30 bar	25 bar	0,5 – 30 bar	G3" IG DIN/ANSI-flange
757LE 	15	40 bar	30 bar	25 bar	0,5 – 30 bar	G2" IG DIN/ANSI-flange
747LE 	3,6	40 bar	30 bar	25 bar	0,5 – 30 bar	G1" IG DIN/ANSI-flange
737LE 	2,4	60 bar	60 bar	25 bar	0,5 - 9 bar	G3/4" IG
737LE-HD 	1,65	300 bar	200 bar	60 bar	2 – 45 bar	G3/4" IG

## GAS FILTERS

Modell	Concinnity	Gases / Max. working pressures					Connection
		Oxygen (O)	LPG (P)	Hydrogen (H)	Natural Gas (M)	Neutral Gas	
HD gas filter 	30 µm / 80 µm	50 bar	275 bar	275 bar	275 bar	275 bar	G 3/4" IG

## OUR PRODUCT RANGE

### GAS CONTROL EQUIPMENT

- Gas mixing systems
- Gas metering systems
- Gas analysers
- Leak detection systems
- Gas pressure vessels
- Engineering of customised systems

### GAS SAFETY EQUIPMENT

- Flashback arrestors
- Non-return valves / check valves
- Quick couplers
- Safety relief valves
- Stainless steel devices
  - Gas filters
- Pressure regulators
- Outlet points
- Lance holders
- Ball valves
- Automatic hose reels
- Test equipment
- Accessories
- Customised safety equipment

### WITT-Gasetechnik GmbH & Co KG

Salinger Feld 4-8  
58454 Witten  
Postfach 2550  
58415 Witten  
Deutschland  
Tel. +49 (0)2302 8901-0  
Fax +49 (0)2302 8901-3  
www.wittgas.com  
witt@wittgas.com

### GUSTUS & PARTNER GmbH

Installation – Service – Wartung  
Alt Salbke 6-10, Geb. 59  
39122 Magdeburg  
Deutschland  
Tel. +49 (0)391 4015246  
Fax +49 (0)391 4013296  
gustus@wittgas.com

### WITT Tecnología de Gas, S.L.

C/Simón Cabarga N° 2a – Bajo  
39005 Santander  
España  
Tel. +34 942 835142  
Fax +34 942 835143  
witt-espana@wittgas.com

### WITT FRANCE S.A.R.L.

131 Voie de Compiègne  
91390 Morsang sur Orge  
France  
Tel. +33 (0)160 151779  
Fax +33 (0)160 154782  
witt-france@wittgas.com

### WITT Gas Techniques Ltd.

Unit 7 Burtonwood Industrial Estate  
Phipps Lane, Burtonwood  
Warrington, Cheshire  
WA5 4HX  
Great Britain  
Tel. +44 (0)1925 234466  
Fax +44 (0)1925 230055  
witt-uk@wittgas.com

### WITT GAS INDIA PVT.LTD.

855/N, Upen Banerjee Road  
Kolkata 700060  
West Bengal  
India  
Tel. +91 9831319810  
witt-india@wittgas.com

### WITT ITALIA Srl.


Via Giovanni XXIII, 18  
24030 Solza (BG)  
Italia  
Tel. +39 035 4933273  
Fax +39 035 4948098  
witt-italia@wittgas.com

### WITT POLSKA Sp. z o. o.

Ul. Bulwar Dedala 16a  
54-130 Wrocław  
Poland  
Tel. +48 71-352 28 56  
Fax +48 71-351 31 13  
witt-polska@wittgas.com

### WITT Gas Controls LP

3080 Northfield Place  
Suite 111  
Roswell, GA. 30076  
USA  
Tel. +1 770 664 4447  
Fax +1 770 664 4448  
witt-usa@wittgas.com

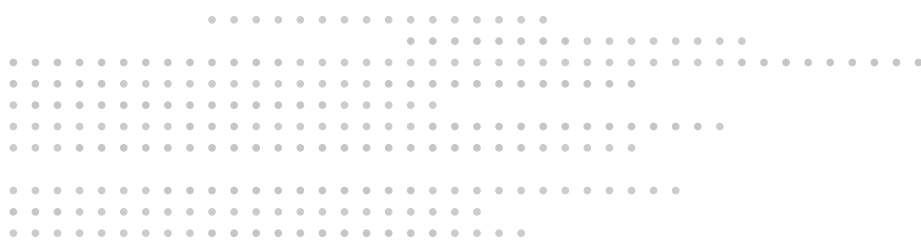

Please contact us for partners  
in your country