
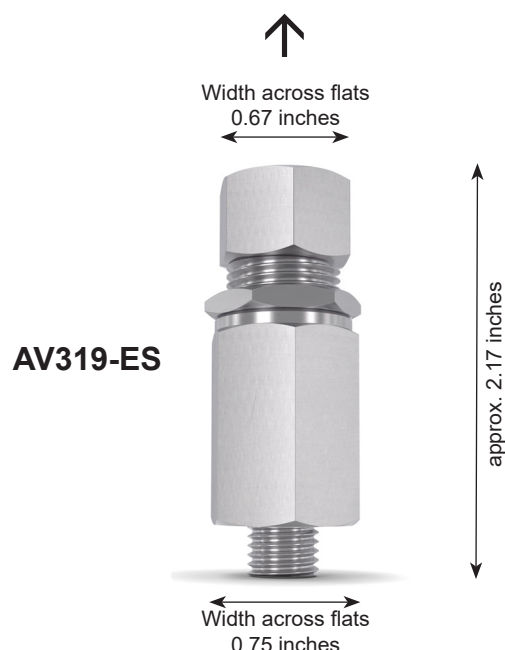


SAFETY RELIEF VALVE AV319

0.15 up to 1.16 PSI

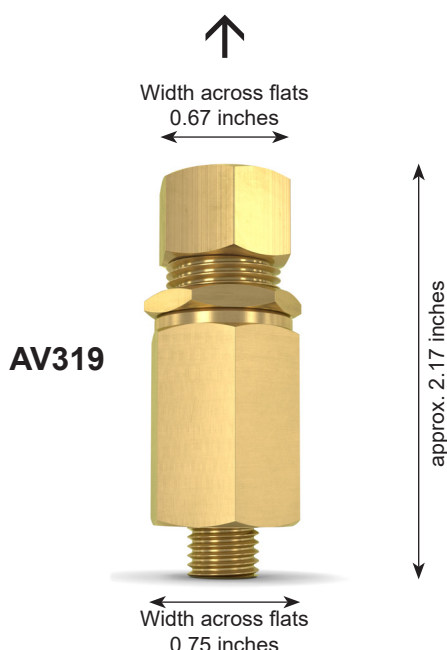

Spring loaded, direct acting safety relief valve for venting excess pressure from receivers, pipelines and other equipment.

Every safety relief valve 100% tested.

Benefits

- individual opening pressure
- TÜV-certification of pressure setting (optional)
- available in brass or stainless steel (ES)
- sealing material to suit gas or customer request
- compact size for easy, problem free installation
- free of oil and grease

Approvals

Company certified according to ISO 9001 and PED 2014/68/EU Module H


Designed for Oxygen Service in accordance with EIGA 13/20 and CGA G-4.4: Oxygen Pipeline and Piping Systems

Cleaned for Oxygen Service in accordance with EIGA 33/18 and CGA G-4.1: Cleaning of Equipment for Oxygen Service

Other models, options and accessories available upon request.

Please identify the individual gases, temperature and opening pressure at the time of enquiring!

	AV319
Opening pressure	from 0.000002176 up to < 0.02 PSI
Gases	all technical gases
Material	housing and metal turned parts made of brass or stainless steel, pressure spring made of stainless steel, valve seal corresponding to the gas
Width across flats	inlet 0.75 mm outlet 0.67 mm
Weight	approx. 2.82 ozg
Connections	inlet G 1/8 male outlet G 1/8 female
Marking	WITT AV*319 0.73 PSI PN16 Art.-No. date of manufacture
Temperature range	-40°F up to approx. +392°F (in accordance to gas and valve sealing)

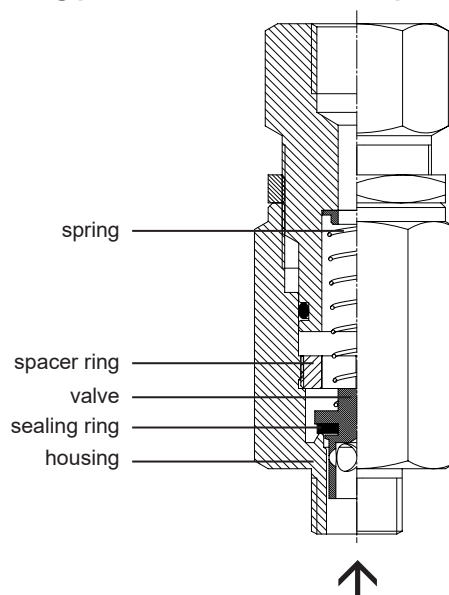

SAFETY RELIEF VALVE AV319

0.15 up to 1.16 PSI



Flow capacity for air and closing pressure at 68°F
(valid only for atmospheric back pressure)

Standard reference conditions: 32°F / 14.7 PSI

Flow capacity at $p = 2 \times p_e$ [NSCFH]

p_e = Setting pressure

Connection G 1/8

p_e Setting pressure [PSI]	0.15	0.44	0.73	0.94	1.16
Flow capacity [SCFH]	0.97	19.28	34.54	40.05	47.89
Closing pressure in % of p_e	57	62	72	73	77

other connections available on request